
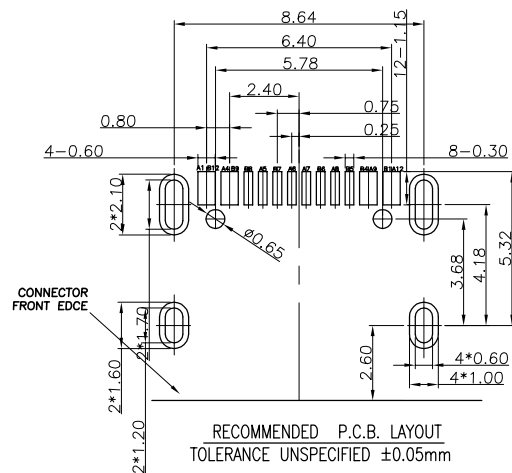
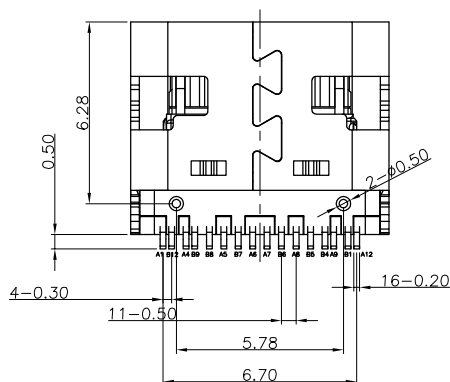
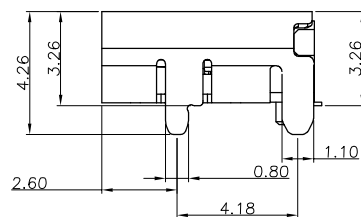
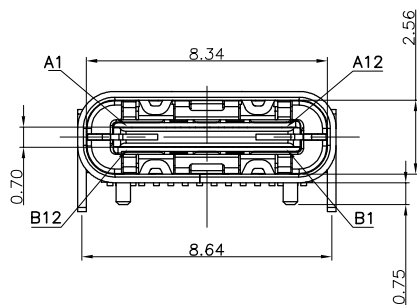



符合"DLK环境管理物质技术标准",符合USB协会规范要求

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN17061	A	20171017	NEW	—	—



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

- NOTES:
- 1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD FLASH PLATED ON CONTACT AREA,
100u" Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS304-H,T=0.30 $\pm$ 0.03mm
50u" NICKEL PLATING OVER ALL.
SHILD: SUS304-H,T=0.12 $\pm$ 0.03mm
 - 2.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 10000 CYCLES
 - 3.ELECTRICAL:
CURRENT: 5A FOR VBUS;
0.25A FOR OTHER.
VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40m Ω MAX.
INSULATION RESISTANCE: 100M Ω MIN.
 - 4.ENVIRONMENTAL
TEMPERATURE RANGE -40°C ~ +85°C

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	$\pm 1^\circ$
X.	± 0.30
.X	± 0.25
.XX	± 0.15
.XXX	± 0.10
A4	



德力康电子科技有限公司

DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C	名称 TITLE	USB 3.1 C 16PF SMT 板上母座 单排短体2.0版			
	档案名称 FILE NAME.	C-U3C46-00-00	料号 PART NO.	U3C46A-24BXXRX0	
	DRAWING	yh.wang	CHECKED		APPROVED 严成旺
	UNIT:	mm	SCALE	1:1	SHEET: 1 of 1