

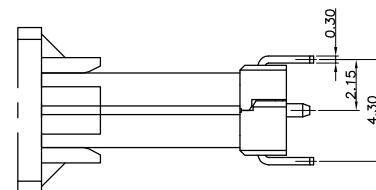
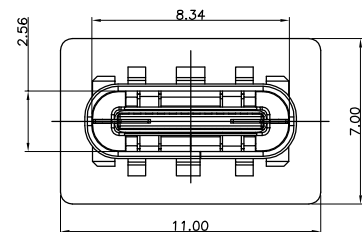



符合"DLK环境管理物质技术标准",符合USB协会规范要求



工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN17061	A	20171017	NEW	—	—

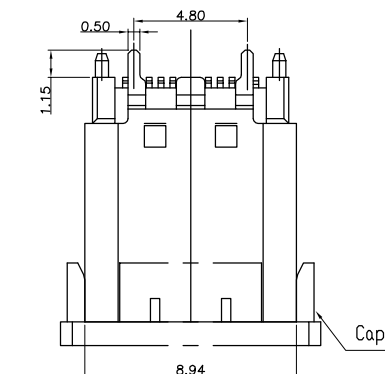

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

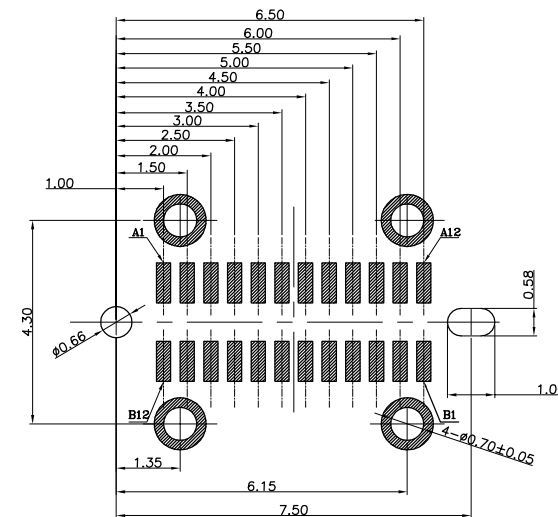

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm

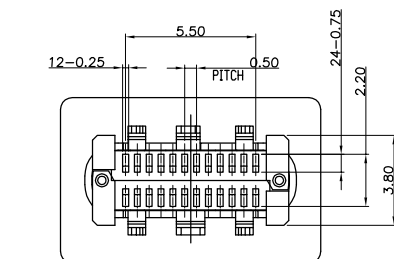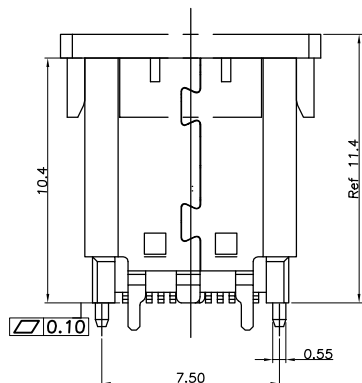

- 备注:
- 1.1胶芯: LCP+30%G.F UL94V-0
 - 1.2端子: COPPER ALLOY; 镍底, 镀金1μ"
 - 1.3外壳: SUS; 表面镀镍100μ" 或亮锡100μ"
 - 1.3护板: SUS
- 2.主要特性:
- 2.1额定电流: 5A MIN FOR VBUS
0.25A MIN FOR OTHER
 - 2.2接触阻抗: 40mΩ MAX
 - 2.3绝缘阻抗: 100MΩ MIN 100V DC
 - 2.4耐压测试: 100V AC
 - 2.5整体插入力: 0.50-2.00kfg MAX
整体拔出力: 0.80-2.00kfg MIN
 - 2.6使用寿命: 10000次
 - 2.7工作温度: -40℃~+85℃

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	±1°
X.	±0.30
.X	±0.25
.XX	±0.15
.XXX	±0.10
A4	⌀



德力康电子科技有限公司
DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C 名称 TITLE	USB 3.1 C TYPE直立短体 SMT成品两脚插板10.4L			
档案名称 FILE NAME.	C-U3C48-00-00	料号 PART NO.	U3C48B-24BXXRXN0	
DRAWING	yh.wang	CHECKED	APPROVED	严成旺
UNIT:	mm	SCALE	1:1	SHEET: 1 of 1