


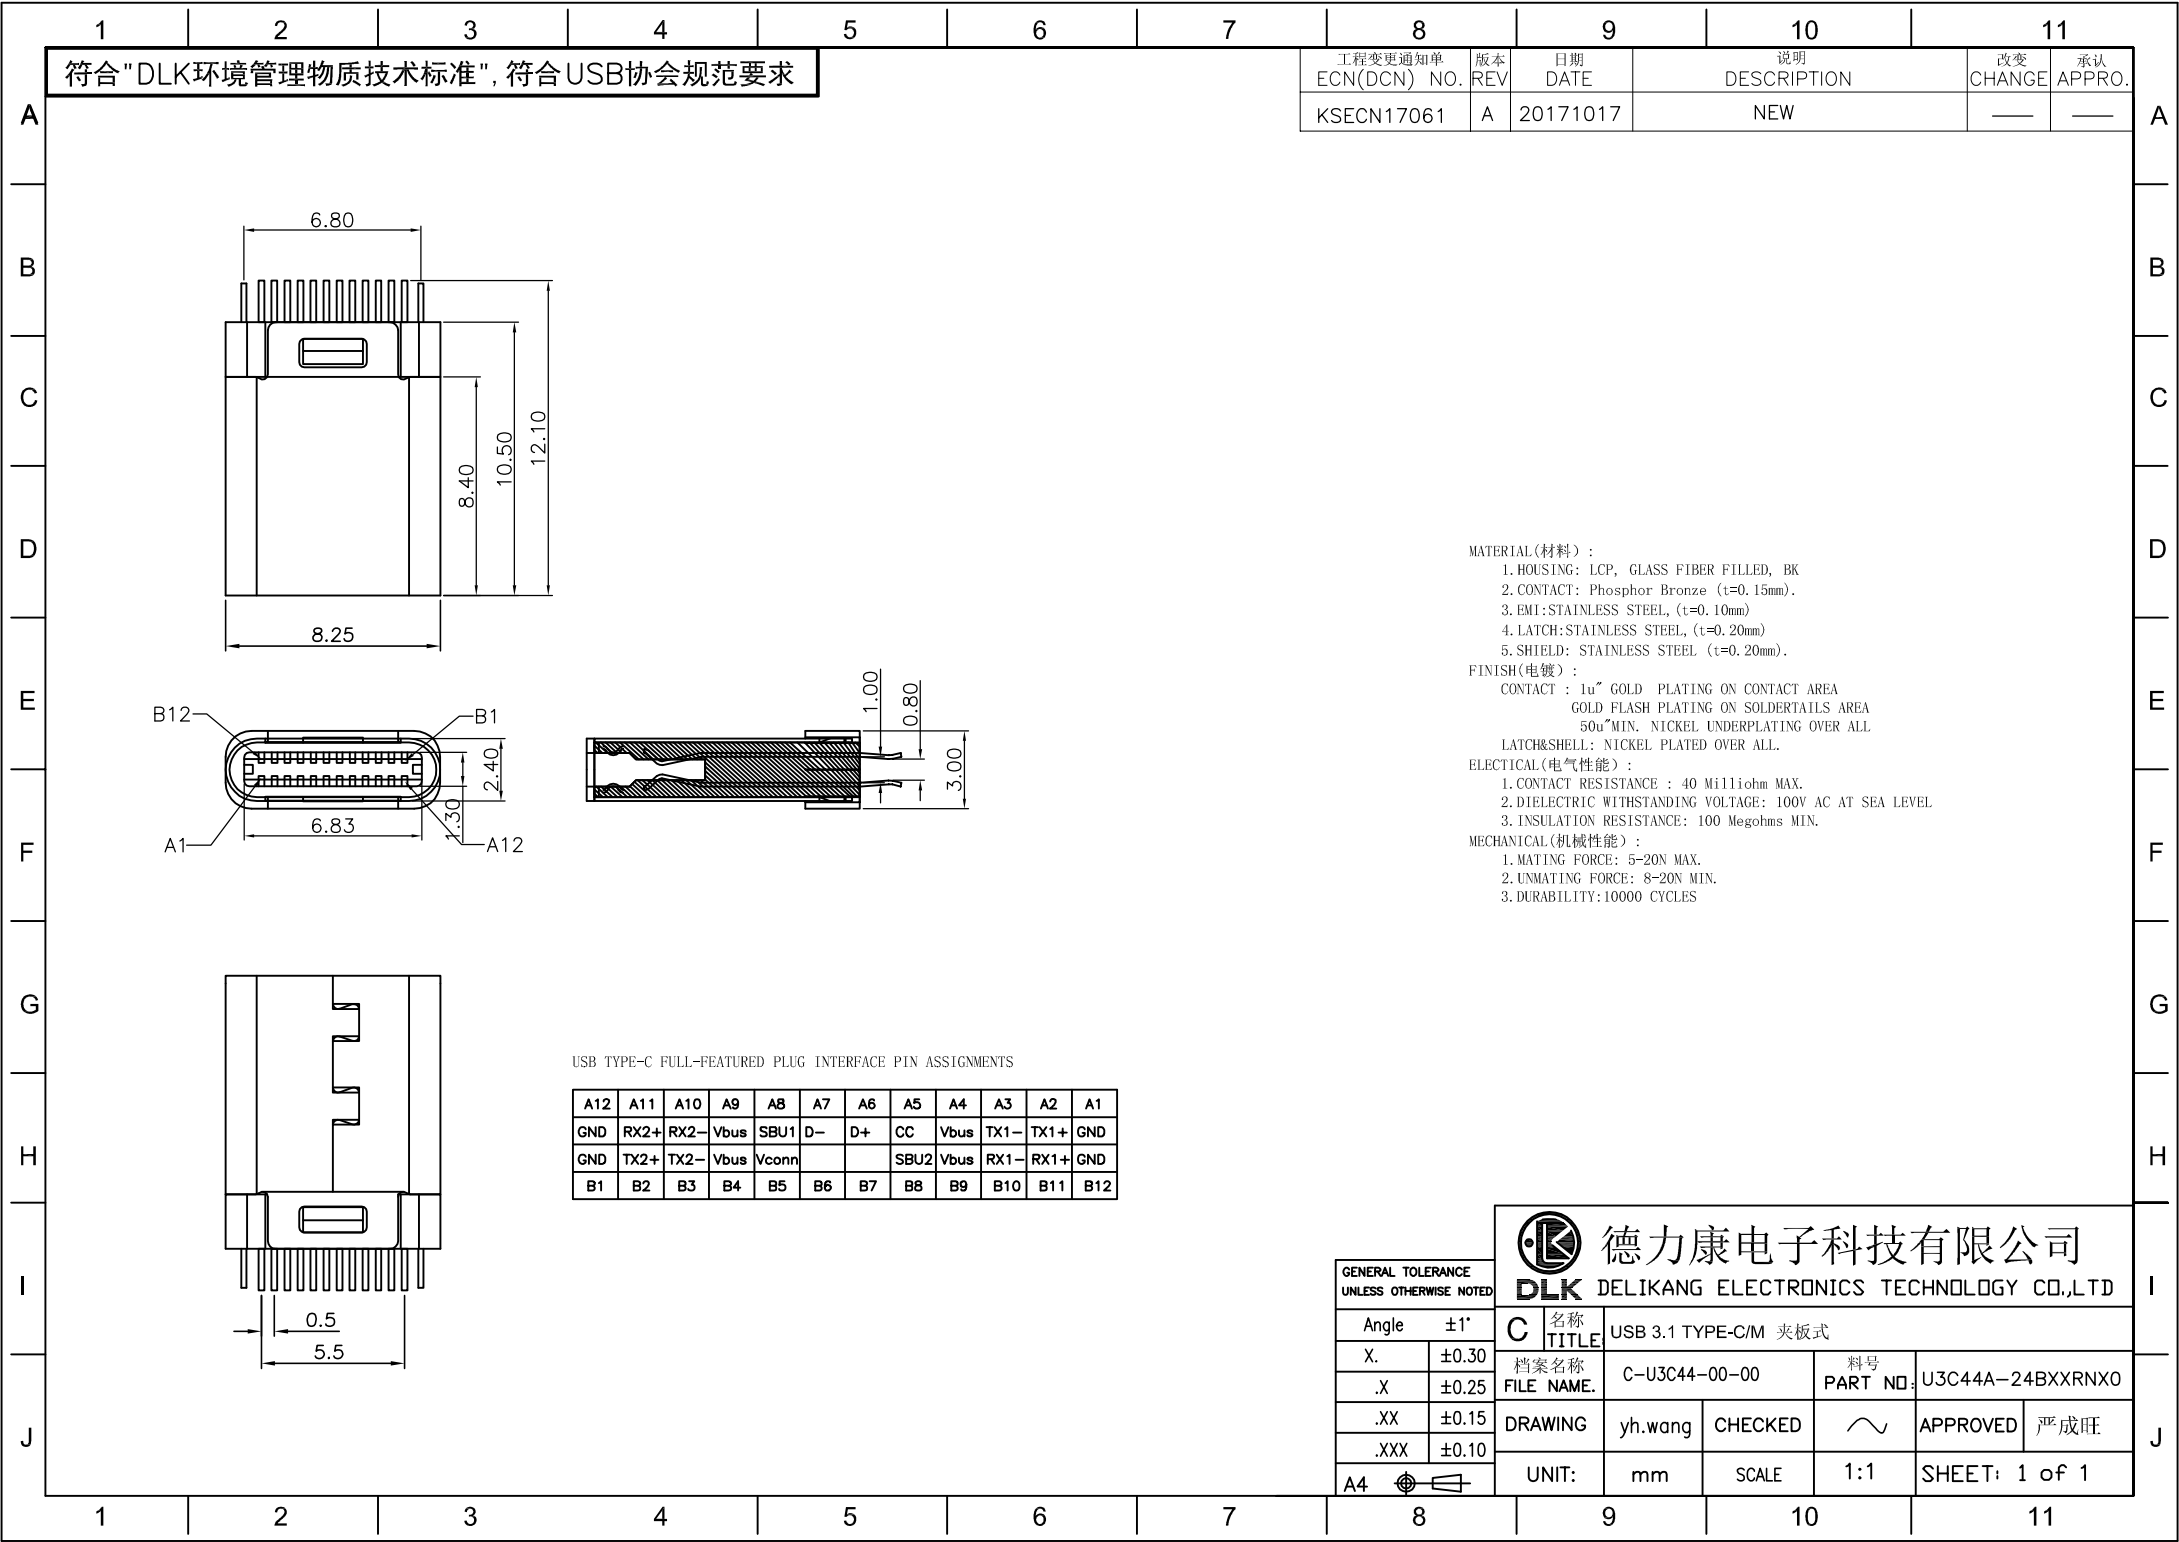

符合"DLK环境管理物质技术标准",符合USB协会规范要求

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN17061	A	20171017	NEW	—	—

MATERIAL(材料) :
1. HOUSING: LCP, GLASS FIBER FILLED, BK
2. CONTACT: Phosphor Bronze (t=0.15mm).
3. EMI: STAINLESS STEEL, (t=0.10mm)
4. LATCH: STAINLESS STEEL, (t=0.20mm)
5. SHIELD: STAINLESS STEEL (t=0.20mm).
FINISH(电镀) :
CONTACT : 1u" GOLD PLATING ON CONTACT AREA
GOLD FLASH PLATING ON SOLDER TAILS AREA
50u"MIN. NICKEL UNDERPLATING OVER ALL
LATCH&SHELL: NICKEL PLATED OVER ALL.
ELECTICAL(电气性能) :
1. CONTACT RESISTANCE : 40 Milliohm MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC AT SEA LEVEL
3. INSULATION RESISTANCE: 100 Megohms MIN.
MECHANICAL(机械性能) :
1. MATING FORCE: 5-20N MAX.
2. UNMATING FORCE: 8-20N MIN.
3. DURABILITY: 10000 CYCLES

USB TYPE-C FULL-FEATURED PLUG INTERFACE PIN ASSIGNMENTS

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Vbus	SBU1	D-	D+	CC	Vbus	TX1-	TX1+	GND
GND	TX2+	TX2-	Vbus	Vconn			SBU2	Vbus	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	±1°
X.	±0.30
.X	±0.25
.XX	±0.15
.XXX	±0.10
A4	

德力康电子科技有限公司
DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C	名称 TITLE	USB 3.1 TYPE-C/M 夹板式			
	档案名称 FILE NAME.	C-U3C44-00-00	料号 PART NO.	U3C44A-24BXXRXN0	
	DRAWING	yh.wang	CHECKED		APPROVED 严成旺
	UNIT:	mm	SCALE	1:1	SHEET: 1 of 1