


符合"DLK环境管理物质技术标准",符合USB协会规范要求

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN17061	A	20171017	NEW	—	—

MATERIAL(材料):
1. HOUSING: LCP, GLASS FIBER FILLED, BK
胶芯: LCP, GLASS FIBER FILLED, 黑色
2. CONTACT: Phosphor Bronze (t=0.15mm)
端子: C5210R-H T=0.15mm
3. GUARD PLATE: STAINLESS STEEL, T=0.10mm
护板: 不锈钢 T=0.10mm
4. SHIELD: STAINLESS STEEL (t=0.20mm)
铁壳: 不锈钢 (t=0.20mm)
FINISH(电镀):
CONTACT: GOLD FLASH PLATING ON CONTACT AREA
80u"~150u" TIN(MATTE) PLATING ON SOLDERTAILS AREA
50u"~100u" NICKEL UNDERPLATING OVER ALL
端子: 接触区先镀金30u", 焊接区镀锡80~150u" MIN, 镀锡底50u" ~100u"
SHELL: PLATED 50u" Min NICKEL PLATING
铁壳: 镀全镍50u" Min
ELECTICAL(电气性能):
1. CONTACT RESISTANCE: 40 Milliohm MAX.
接触电阻: 40 Milliohm MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC AT SEA LEVEL
耐压: 100V AC AT SEA LEVEL
3. INSULATION RESISTANCE: 100 Megohms MIN.
绝缘电阻: 100 Megohms MIN
MECHANICAL(机械性能):
1. MATING FORCE: 5~20N MAX.
插入力: 5~20N MAX.
2. UNMATING FORCE: 10~20N MIN.
拔出力: 8~20N MIN
3. DURABILITY: 10000 CYCLES
耐久: 10000次

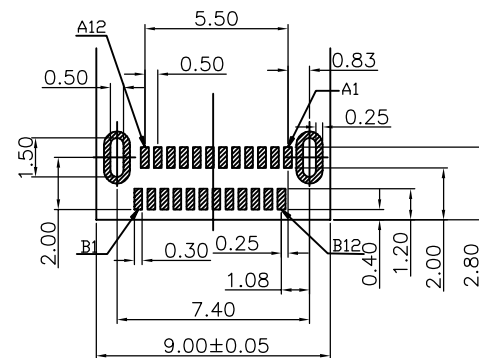

RECOMMEND PCB LAYOUT
(THICKNESS: 0.8 OR 1.00mm)

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	±1°
X.	±0.30
.X	±0.25
.XX	±0.15
.XXX	±0.10
A4	

德力康电子科技有限公司
DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C 名称 TITLE	USB 3.1 TYPE-C/M SMT焊板外壳插板			
档案名称 FILE NAME.	C-U3C43-00-00	料号 PART NO.	U3C43A-24BXXRX0	
DRAWING	yh.wang	CHECKED		APPROVED 严成旺
UNIT:	mm	SCALE	1:1	SHEET: 1 of 1