

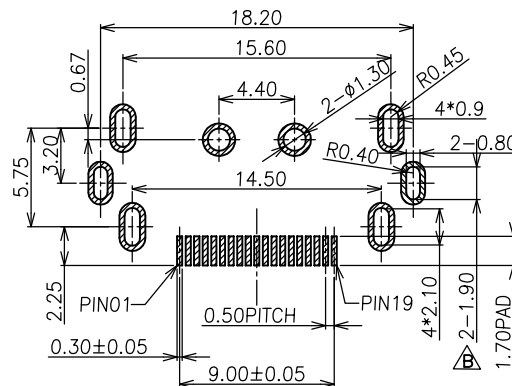

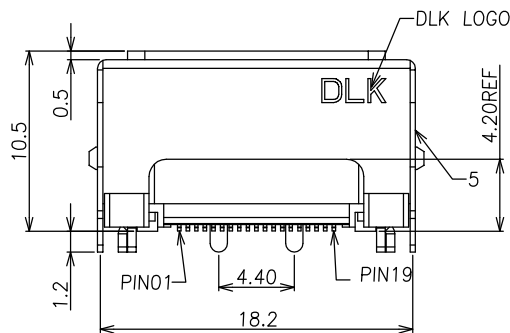
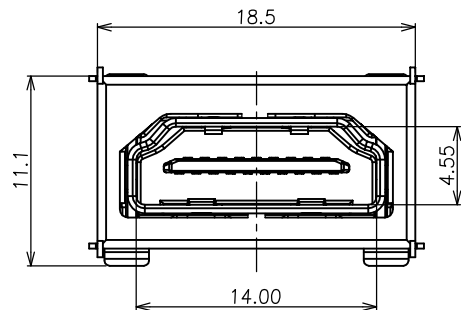


符合"DLK环境管理物质技术标准"

工程变更通知单 ECN (DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN16048	A	20160711	NEW	—	—
KSECN16062	B	20160918	1. 屏蔽罩脚尺寸由1.50修改为1.30 2. 依实物修改PCB板脚位尺寸由2.30改为1.90	陈浩泽	王永辉




PCB LAYOUT(TOP VIEW T1.2)

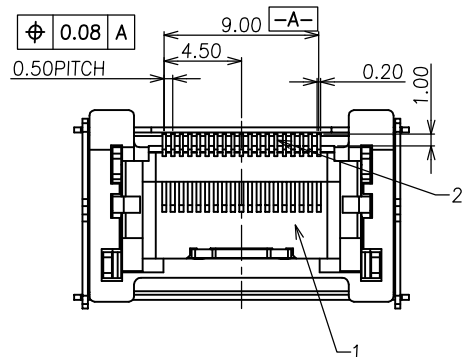

HDM4L B-19 B G2 R N3 0
① ② ③ ④ ⑤ ⑥ ⑦

- ① PRODUCTION CODE:
HDM2L: HDMI SERIES
② CHARACTER:
B: STRAIGHT ANGLE TYPE
③ POSITION:
19:19PIN
④ COLOR OF HOUSING:
B: BLACK COLOR
⑤ PLATING OF CONTACT:
G2: G/F PLATED
⑥ PACKAGE(包装):
R: TAPE&REEL PACKAGE
⑦ PLATING OF SHELL:
N3: NI PLATD

- 1: MATERIAL:
HOUSING AND STOPPLE: THERMOPLASTIC
UL94V-0 BLACK
CONTACT: COPPER ALLOY, T=0.2mm
SHELL: COPPER ALLOY, T=0.5mm
2: MECHANICAL CHARACTERISTICS:
INSERTION FORCE: 44.1N MAX
EXTRACTION FORCE: 9.8-39.2N
DURABILITY: 10000 CYCLES
TERMINAL RETENTION: 0.3Kgf MIN
OPERATING TEMPERATURE: -20°C-- +85°C
STORAGE TEMPERATURE: -20°C-- +65°C
3: ELECTRICAL CHARACTERISTICS:
RATING CURRENT: 0.5A
RATING VOLTAGE: 40V
CONTACT RESISTANCE: 10mΩ MAX
INSULATION RESISTANCE:
100MΩ MIN AT 500VAC
DIELECTRIC WITHSTANDING VOLTAGE:
500VAC/1MINUTE

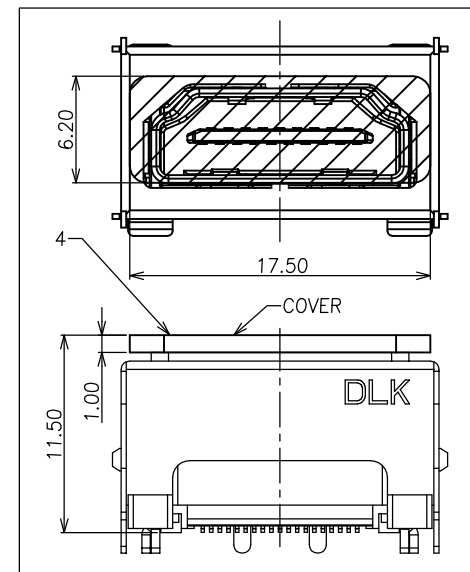

5	SHIELD CASE	1	SPTF	TIN PLATED
4	STOPPLE	1	LCP	UL94V-0, BLACK
3	SHELL	1	SPCC	PLATED Ni
2	CONTACT	19	COPPER ALLOY	PLATED Au
1	HOUSING	1	LCP	UL94V-0, BLACK
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	±1°
X.	±0.30
.X	±0.25
.XX	±0.15
.XXX	±0.10
A4	⌀



德力康电子科技有限公司
DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C 名称 TITLE:	HDMI A/F V/T 10.5H 19PIN CONN.			
档案名称 FILE NAME:	C-HDM4L-00-00	料号 PART NO:	HDM4LB-19BG2RN30	
DRAWING	GP. LU	CHECKED	APPROVED	严成旺
UNIT:	mm	SCALE	1:1	SHEET: 1 of 1