
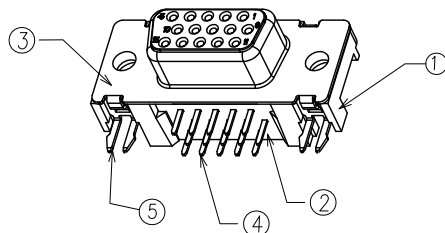



符合“DLK环境管理物质技术标准”

符合“IEC协会标准”

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
_____	A	20140918	NEW	_____	_____
KSECN16067	B	20160927	后盖增加逃料 $\triangle$ *1	万小龙	王永辉

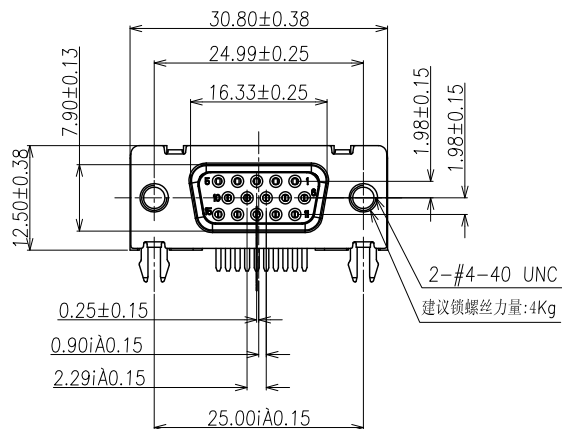


螺丝规格


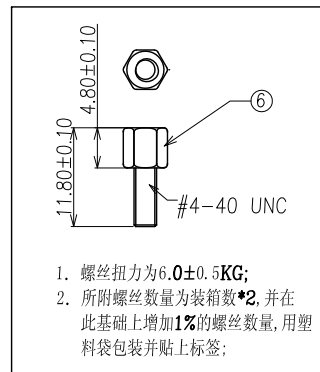


DSB4N D-15 L S1 Y N3 *




- ① PRODUCTION CODE (产品编码): DSB4N: D-SUB-15PIN(3.0) CONN
- ② CHARACTER (特征): D: DIP TYPE
- ③ POSITION (位数): 15: 15PIN
- ④ COLOR OF HOUSING(本体颜色): L: BLUE COLOR
- ⑤ PLATING OF CONTACT(端子电镀): S1 :GOLD FLASH AND TIN PLATED (镀雾锡)
- ⑥ PACKAGE(包装): Y :TRAY PACKAGE
- ⑦ PLATING OF SHELL(铁壳电镀): N3:NI PLATD
- ⑧ TYPE:
0: 无螺丝
1: 锁螺丝
4: 附螺丝




DETAIL A



DLK LOGO

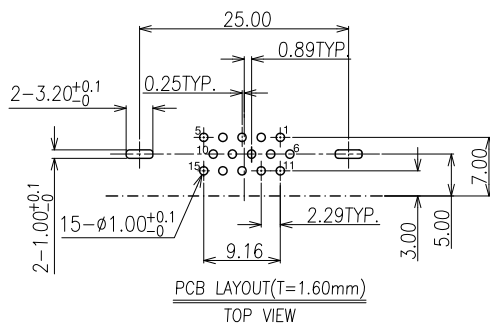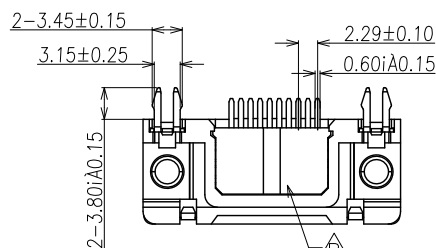

电镀规格:

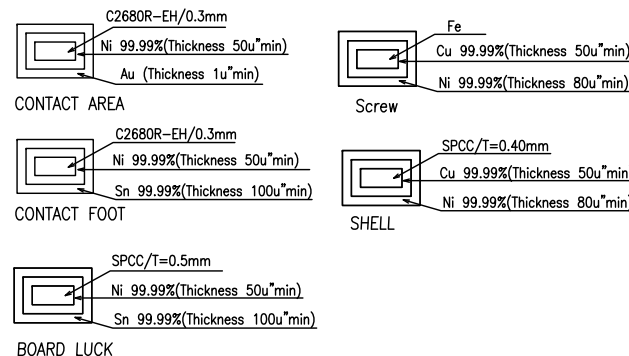

6	Screw	2	FERROALLOY	Nickel plated
5	BOARD LUCK	2	FERROALLOY	Tin PLATED
4	Contact	15	COPPER ALLOY	Au And Tin plated
3	Shell	1	FERROALLOY	Ni PLATED
2	Cover	1	PBT	UL94V-0,BLUE
1	Housing	1	PBT	UL94V-0,BLUE
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE UNLESS OTHERWISE NOTED		德力康电子科技有限公司 DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD			
Angle	±5°				
X.	±0.50				
.X	±0.38				
.XX	±0.25				
.XXX	±0.10				
A4					
名称 TITLE:		D-SUB R/A 12.5H CONN			
料号 PART NO:		C-DSB4N-00-00		DSB4ND-15LS1YN3*	
料号 PART NO:		王 永 辉		APPROVED 严成旺	
UNIT:		mm		SCALE	
		1:1		SHEET: 1 of 1	