


符合“DLK环境管理物质技术标准”

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	变更 CHANGE	核准 APPRO.
KSECN16078	A	20161118	NEW	—	—

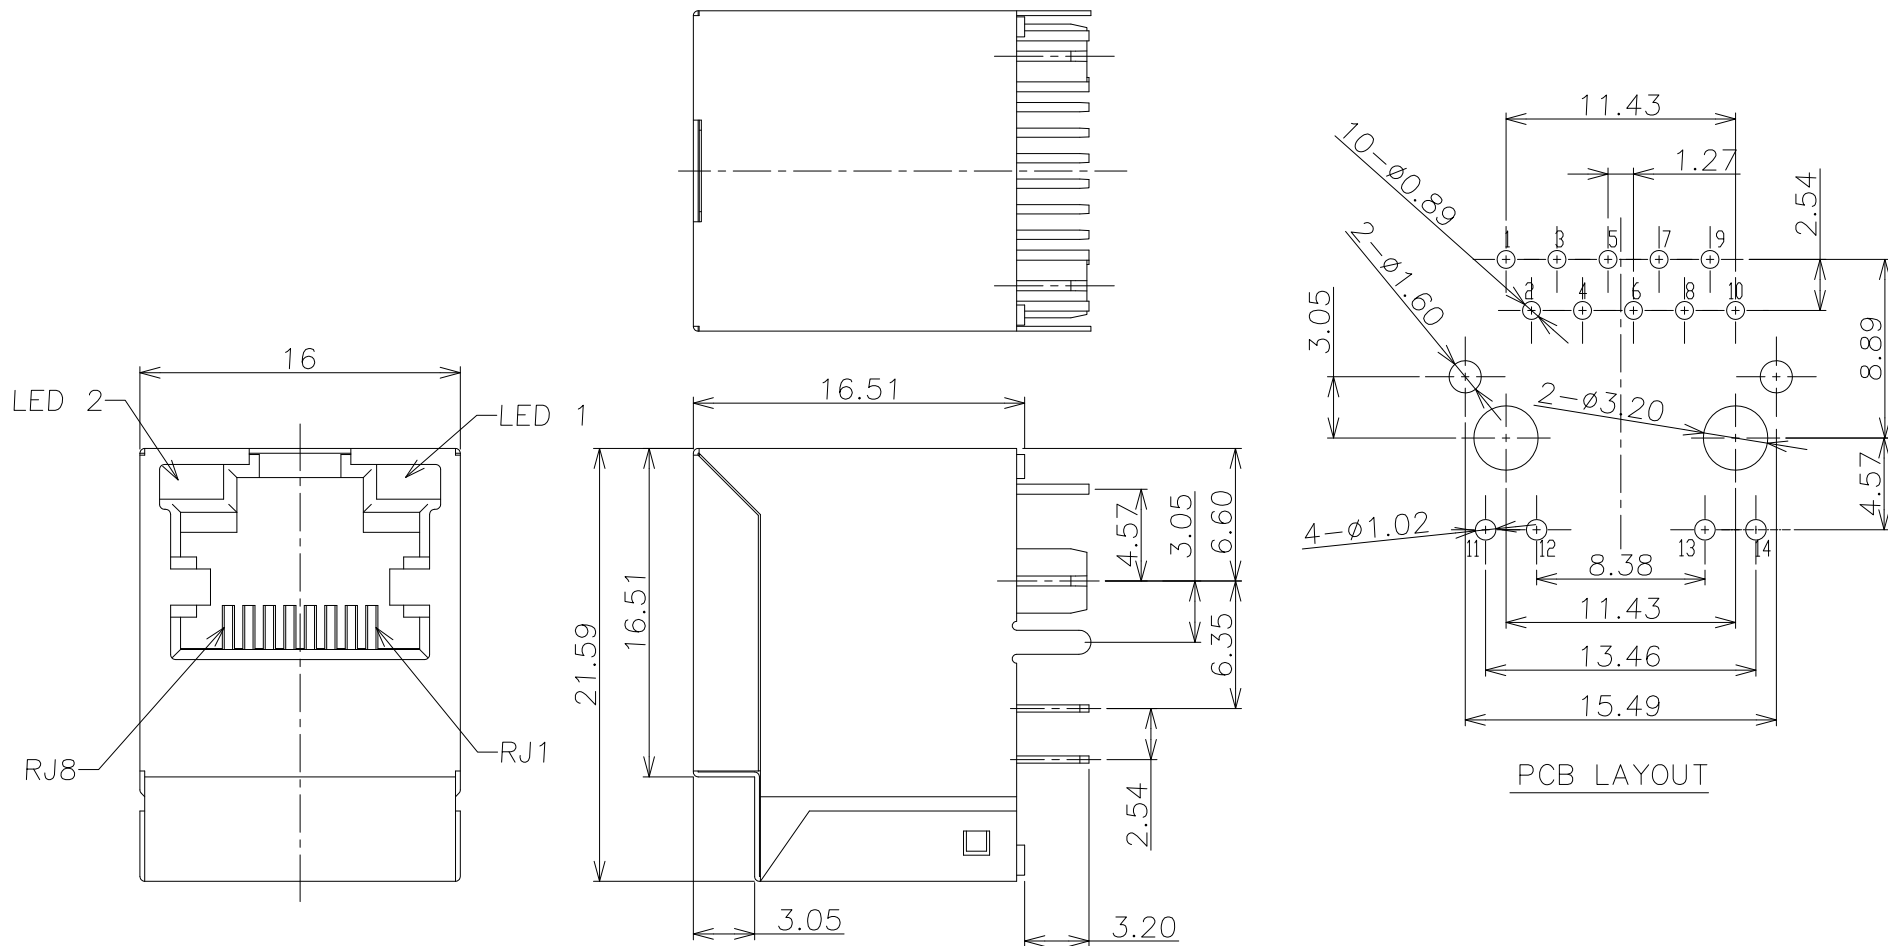

SpecificationLED

Standard LED Color	LED Wavelength	Forward (V MAX)	Typical (V TYP)	Luminous Intensity
Green	560-580 nm	2.5V	2.1-2.2V	9-25 MCD
Yellow	580-610 nm	2.5V	2.1-2.2V	9-30 MCD

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	±5°
X.	±0.38
.X	±0.30
.XX	±0.25
.XXX	±0.10
A4	⌀





德力康电子科技有限公司

DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C 名称 TITLE:	RJ45 1X1 180D 10P8C 双色灯			
档案名称 FILE NAME:	C-RJK47-00-01	料号 PART NO:	RJK47C-14BS4YN11	
DRAWING	王永辉	CHECKED	—	APPROVED 严成旺
UNIT:	mm	SCALE	1:1	SHEET: 1 of 2

符合“DLK环境管理物质技术标准”

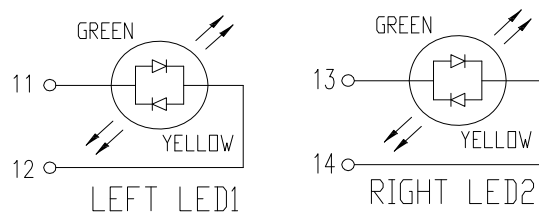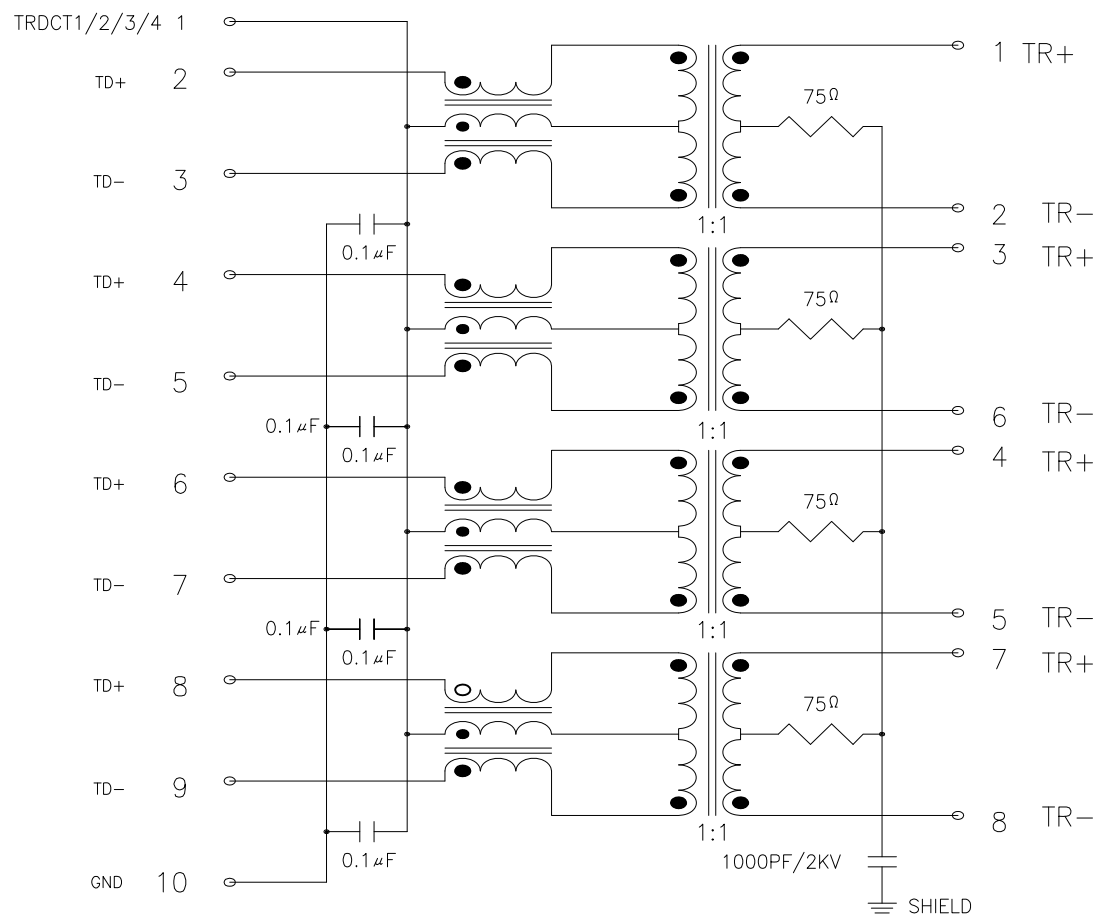

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	变更 CHANGE	核准 APPRO.
KSECN16078	A	20161118	NEW	—	—

材质:

塑壳材料: PBT+30%GF, UL94V-0, 黑色.

插芯: PBT+30%GF, UL94V-0, 黑色.

铜壳: C2680R-H, T=0.20mm, 预镀镍50u"Min.

Plug端子: C5210R-EH, T=0.35mm, 表面镀金15u".

Dip端子: 铜材规格: C2680-H, T=0.35mm.

机械性能:

插拔寿命: 最少750次插拔.

工作环境温度范围: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.

接触力大小: 100g min.

电气性能:

1. 工作电压: 125V AC.
2. 绝缘阻抗: 500 megohms MIN @500VDC.
3. 接触阻抗: 50 milliohms Max.
4. T/R: RX=1CT: 1CT (+/-5%) & TX=1CT: 1CT.
5. OCL: 350uH Min at 100 KHz/0.1Vrms
with 8mA Bias From 0°C To 70°C.
6. Insertion Loss: -1.0 dB Max 1MHZ TO 100MHZ.
7. Retrn Loss: -16dB Min From 1MHz To 30MHz;
-14dB Min From 30MHz To 60MHz;
-10dB Min From 60MHz To 80MHz.
8. Cross Talk: -40dB Min From 1MHz-30 MHz;
-35dB Min From 30MHz To 60MHz.
-30dB Min From 60MHz To 100MHz.
9. CMR: -35dB Min From 1MHz-100MHZ
10. Hi-Pot: 1500V AC 6S 1mA.
11. OUTPOUT to INPUT 2250VDC 0.1MA 60SEC;
12. OUTPUT TO SHIELD 2250VDC 0.1MA 60SEC

 德力康电子科技有限公司 DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED	
Angle ±5°	C 名称 RJ45 1X1 180D 10P8C 双色灯 TITLE:
X. ±0.38	档案名称 C-RJK47-00-01 料号 RJK47C-14BS4YN11 FILE NAME: PART NO:
.X ±0.30	DRAWING 王永辉 CHECKED ——— APPROVED 严成旺
.XX ±0.25	UNIT: mm SCALE 1:1 SHEET: 2 of 2
.XXX ±0.10	
A4 	