
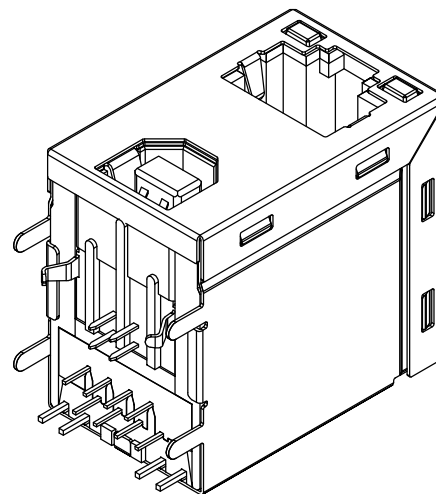


符合"DLK环境管理物质技术标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	变更 CHANGE	核准 APPRO.
_____	A	20180417	NEW RELEASE	—	—

1.Mechanical:

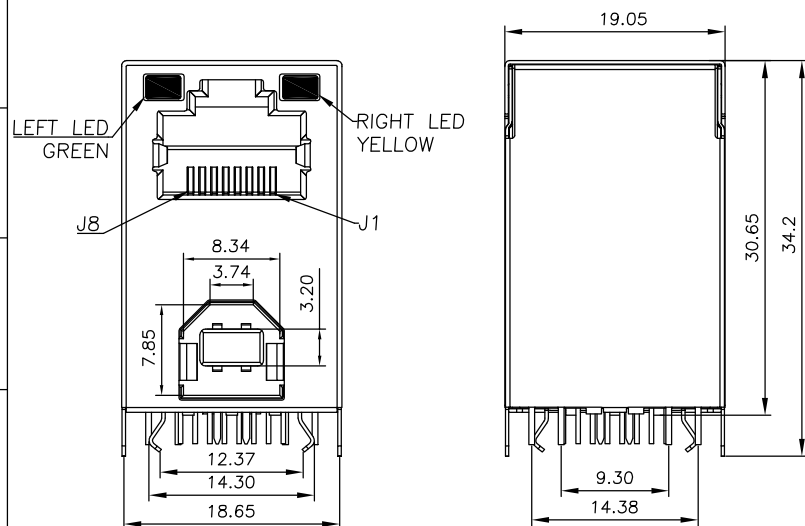

NOTE:

1.MATERIAL:

Housing: High temp. Thermo plastics,PBT ,BK,UL94V-0
Contact:Copper Alloy
Shell: Steel



2.Electrical performance:

Voltage Current Rating:1.5 AMP. 30V AC
Insulation Resistance:1000M Ω Min.
Contact Resistance:30 m Ω Max.
Dielectric Withstanding Voltage:500V AC

3.Temperature Range:-45℃ to +85℃

4.FINISH:

Contact:Tin Plating 100u" on solder tail area,
RJ45 Gold plating 1u" on contact area.
USB Gold plating 1u" on contact area,
30u" min Ni underplating over all.

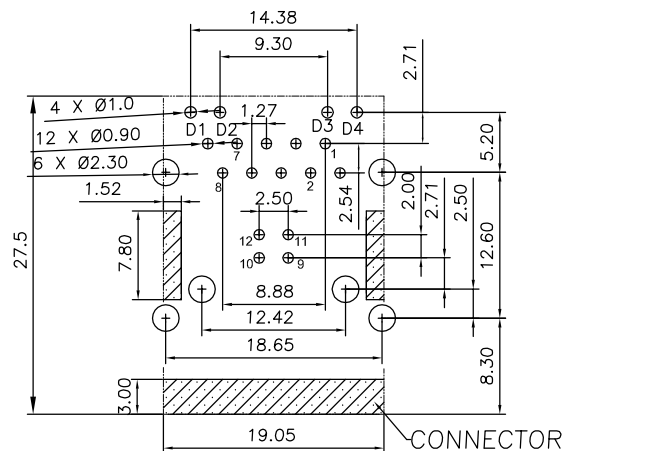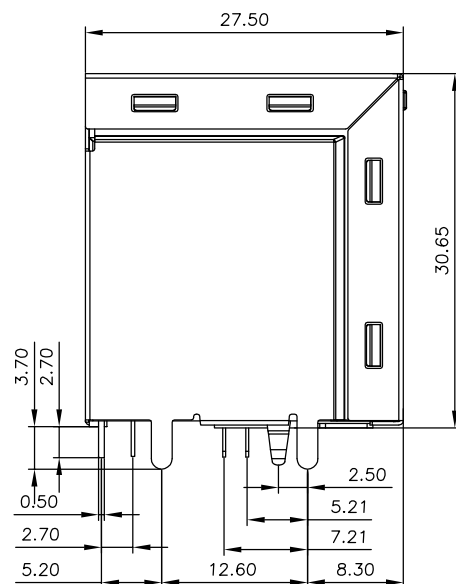

RECOMMENDED P.C.B. PATTERN LAYOUT
COMPONENT SIDE SHOWN

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	$\pm 5^\circ$
X.	± 0.38
.X	± 0.25
.XX	± 0.20
.XXX	± 0.10
A4	



德力康电子科技有限公司
DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C 名称 TITLE:	RJ45 WITH USB B TYPE FEMALE 2.0,WITH LEDs			
档案名称 FILE NAME:	C-RJU84-00-00	料号 PART NO:	RJU84D-16BXXYN10	
DRAWING	王永辉	CHECKED	—	APPROVED 严成旺
UNIT:	mm	SCALE	1:1	SHEET: 1 of 1