

符合"DLK环境管理物质技术标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	变更 CHANGE	核准 APPRO.
_____	A	20180417	NEW RELEASE	_____	_____

NOTE:

1.RJ45 MATERIAL:

1.1 Housing : High Temperature .Thermoplastics.BK.UL94 V-0.

1.2 Contact:Copper Alloy.Flash Gold Plating On Contact Area.
50u" Min.Nickel Underplating Over All.

1.3 Shell :SUS201 Thickness =0.25mm.Nickel Plating or Pre-soldering .

1.4.ELCTRICAL SPECIFICATION :

Voltage Current Rating : 1.5 AMP. 30V AC.

Insulation Resistance : 1000M Ω Min.

Contact Resistance : 30 m Ω Max.

Dielectric Withstanding Voltage : 500V AC.

Durability: 750 cycles.

3.USB

3.1 MATERIAL:

Housing: PBT Blue;Thermoplastics,UL94V-0;

Contact: Copper Alloy

Shell: Free Alloy

Contact: Gold Flash Plated on Contact Area,
80u" Min.Matte Tin Plated on Solder Tails Area,
50u" Min.Nickel Underplating Over All.

3.2 SHELL: 50u" Min.Nickel Underplating Over All.

3.3. ELECTRICAL SPECIFICATION:

3.3.1 Voltage Current Rating: 1.5 AMP. 30V/AC

Insulation Resistance: 100M Ω Min. at 100V/DC for 1Minute.

Withstanding voltage: 100V/AC for 1Minute

Contact Resistance:
30m Ω (Max) initial for VBUS and GND contacts.
50m Ω (Max) initial for all other contacts.

Durability: 1500 cycles.

4.OPERATING TEMPERATURE RANGE : -20°C to +75°C.

5.STORAGE TEMPERATURE RANGE : 0°C to +70°C.

COMPONENT SIDE SHOWN

RECOMMENDED P.C.B. PATTERN LAYOUT










德力康电子科技有限公司
DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD


C	名称 TITLE:	RJ45 WITH SINGLE USB3.0 ,WITH SINGLE TYPE C ,WITH LEDs			
	档案名称 FILE NAME.	C-RJU86-00-00	料号 PART NO:	RJU86D-21BXXYN10	
A4	DRAWING	王永辉	CHECKED	_____	APPROVED 严成旺
	UNIT:	mm	SCALE	1:1	SHEET: 1 of 1

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	$\pm 5^\circ$
X.	± 0.38
.X	± 0.25
.XX	± 0.20
.XXX	± 0.10
A4	

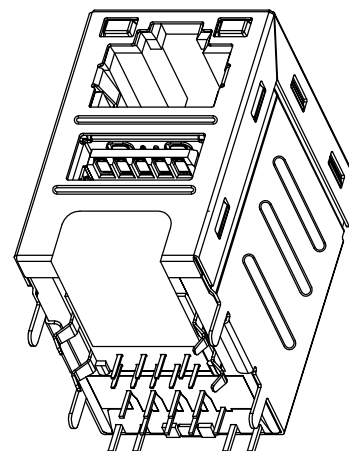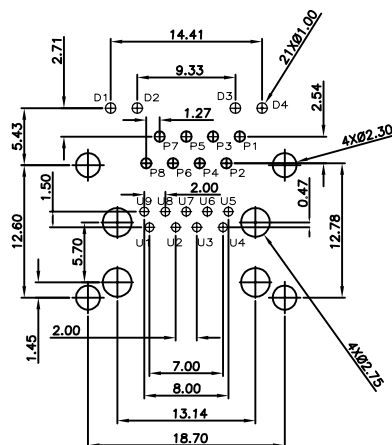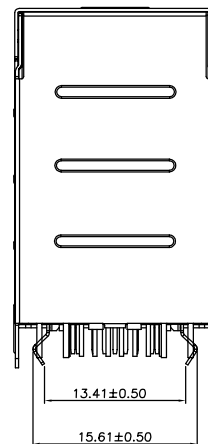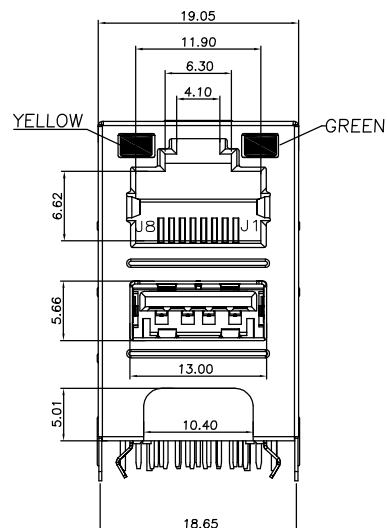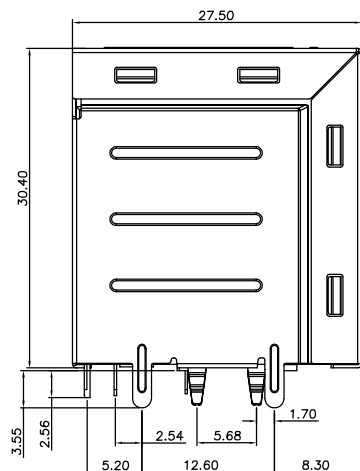

LEFT LED



RIGHT LED