

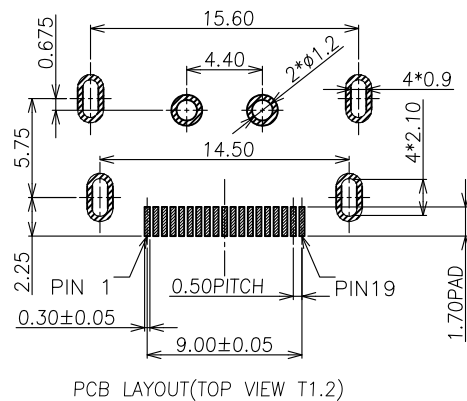
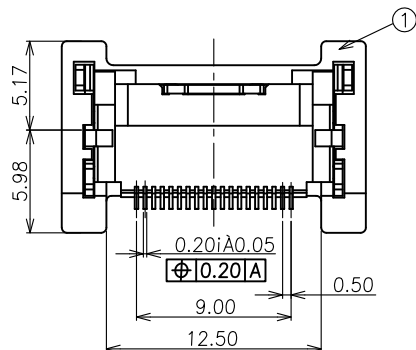
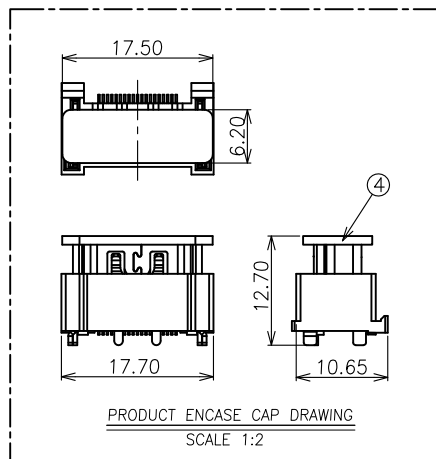

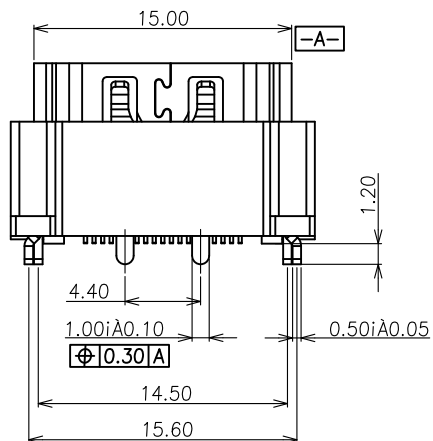



符合“DLK环境管理物质技术标准”

工程变更通知单 ECN (DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN16005	A	20160108	NEW	—	—

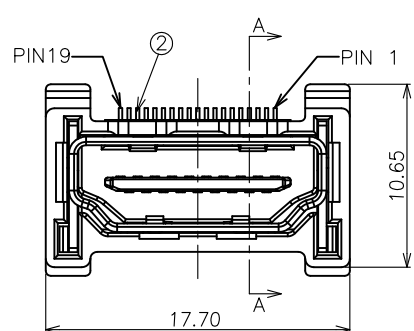

- 1:MATERIAL:
HOUSING AND STOPPLE:THERMOPLASTIC
UL94V-0 BLACK
CONTACT:COPPER ALLOY,T=0.2mm
SHELL:COPPER ALLOY,T=0.5mm
2:MECHANICAL CHARACTERISTICS:
INSERTION FORCE:44.1N MAX
EXTROCTION FORCE:9.8-39.2N
DURABILITY:10000 CYCLES
TERMINAL RETENTION:0.3KgF MIN
OPERATING TEMPERATURE:-20℃--+85℃
STORAGE TEMPERATURE:-20℃--+65℃
3:ELECTRICAL CHARACTERISTICS:
RATING CURRENT:0.5A
RATING VOLTAGE:40V
CONTACT RESISTANCE:10mΩ MAX
INSULATION RESISTANCE:
100MΩ MIN AT 500VAC
DIELECTRIC WITHSTANDING VOLTAGE:
500VAC/1MINUTE

HDM4L B-19 B G2 R N3 L
① ② ③ ④ ⑤ ⑥ ⑦

- ① PRODUCTION CODE:
HDM4L: HDMI SERIES
② CHARACTER:
B:STRAIGHT ANGLE TYPE
③ POSITION:
19:19PIN
④ COLOR OF HOUSING:
B:BLACK COLOR
⑤ PLATING OF CONTACT:
G2:接触区域单面刷Au 1u", 焊接区域双面刷Au 2u"
⑥ PACKAGE(包装):
R:TAPE&REEL PACKAGE
⑦ PLATING OF SHELL:
N3:NI PLATD



德力康电子科技有限公司

DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

4	STOPPLE	1	LCP	UL94V-0,BLACK
3	SHELL	1	SPCC	PLATED Ni
2	CONTACT	19	COPPER ALLOY	PLATED Au
1	HOUSING	1	LCP	UL94V-0,BLACK
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	±1°
X.	±0.30
.X	±0.25
.XX	±0.15
.XXX	±0.10
A4	±0.10

C	名称 TITLE:	HDMI A/F V/T 10.5H 19PIN CONN.	料号 PART NO.:	HDM4L-19BG2RN3L
	档案名称 FILE NAME.	C-HDM4L-00-3L	PART NO. (OLD)	—
	DRAWING	陈浩泽	CHECKED	—
	UNIT:	mm	SCALE	1:1
				SHEET: 1 of 1

A
B
C
D
E
F
G
H
I
J