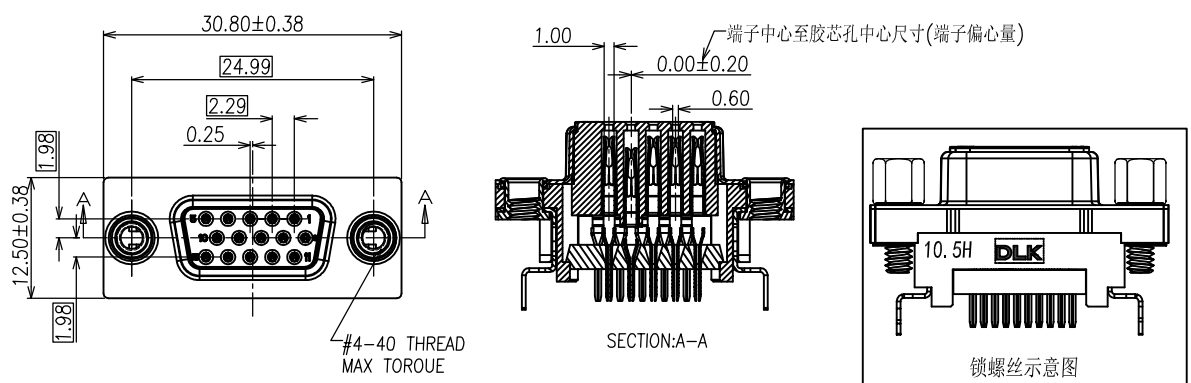
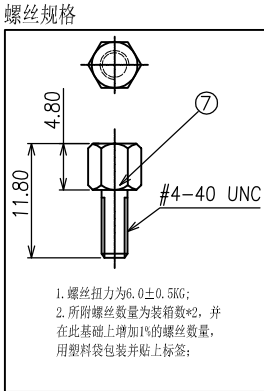
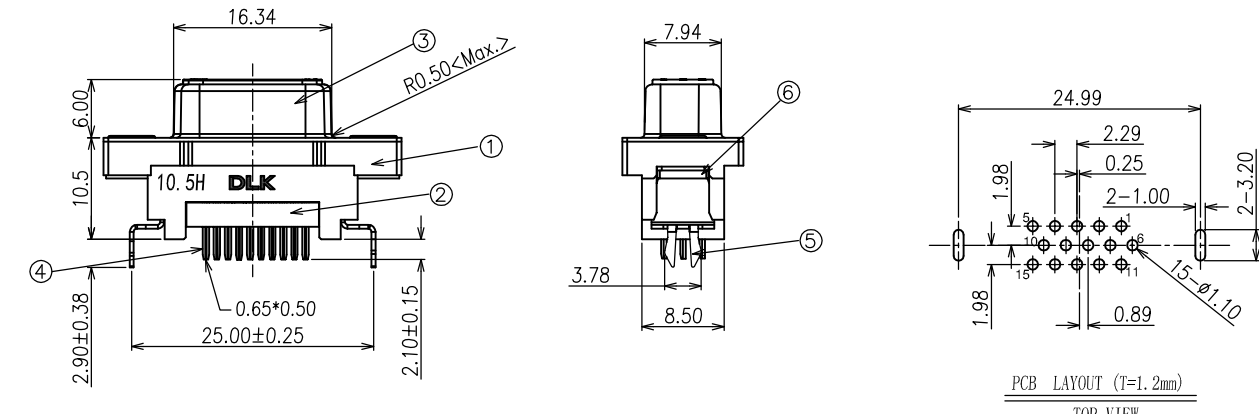


1	2	3	4	5	6	7	8	9	10	11			
符合"DLK环境管理物质技术标准"							工程变更通知单 ECN(DCN) NO.		版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
符合"IEC协会标准"							KSECN14027		A	20140528	NEW RELEASE	—	—
									DSB4F C-15 L S1 Y N3 * ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ① PRODUCTION CODE (产品编码): DSB4F: D-SUB-15PIN(180°&10.5H) ② CHARACTER (特征): C : DIP TYPE(180i) ③ POSITION (位数): 15 : 15PIN ④ COLOR OF HOUSING(本体颜色): L : BLUE ⑤ PLATING OF CONTACT(端子电镀): S1 : Au AND Tin PLATED ⑥ PACKAGE(包装): Y : TRAY PACKAGE ⑦ PLATING OF SHELL(铁壳电镀): N3 : NI PLATED ⑧ TYPE: 0: 无螺丝(后盖8.5宽) 1: 锁螺丝(后盖8.5宽) 6: 附螺丝(后盖8.5宽)				
							电镀规格 C2680R-H/T=0.2mm Ni 99.99%(Thickness 50u"min) Au (Thickness 1u"min) C3601 Ni 99.99%(Thickness 50u"min) C2680R-H/T=0.2mm Ni 99.99%(Thickness 50u"min) Sn 99.99%(Thickness 100u"min) 1215MS Cu 99.99%(Thickness 50u"min) Ni 99.99%(Thickness 80u"min) SPCC/T=0.4mm Ni 99.99%(Thickness 50u"min) Sn 99.99%(Thickness 100u"min) SPCC/T=0.35mm Cu 99.99%(Thickness 50u"min) Ni 99.99%(Thickness 80u"min)						
产品净重: 5.93g/PCS													
7	SCREW	2	FERROALLOY	Ni PLATED			GENERAL TOLERANCE UNLESS OTHERWISE NOTED Angle ±5° X. ±0.30 .X ±0.25 .XX ±0.15 .XXX ±0.10 A4						
6	RIVET	2	COPPER ALLOY	Ni PLATED									
5	BOARD LOCK	2	FERROALLOY	Tin PLATED									
4	CONTACT	15	COPPER ALLOY	Au AND Tin PLATED									
3	SHELL	1	FERROALLOY	Ni PLATED			德力康电子科技有限公司 DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD 王永辉 王成旺						
2	COVER	1	LCP BK	UL94V-0									
1	HOUSING	1	PBT BLUE	UL94V-0									
NO.	ITEM	Q'TY	DESCRIPTION	FINISH			UNIT: mm SCALE 1:1 SHEET: 1 of 1						
1	2	3	4	5	6	7	8	9	10	11			