

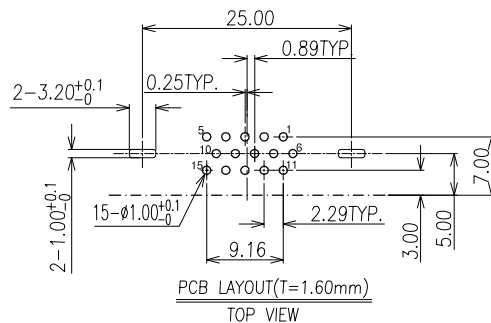
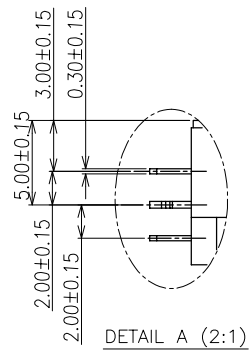
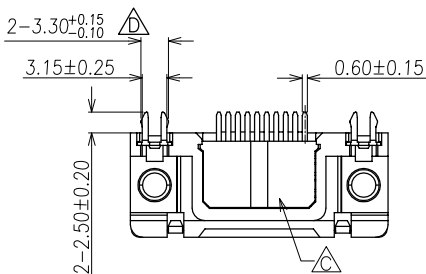

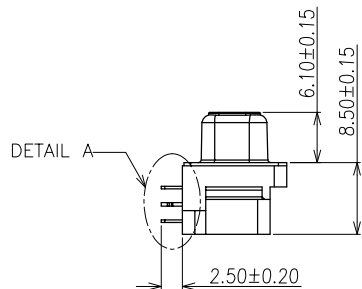

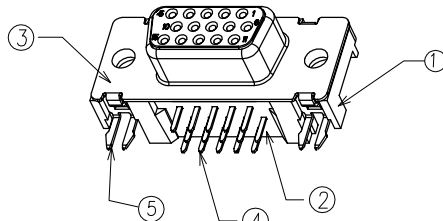


符合"DLK环境管理物质技术标准"

符合"IEC协会标准"

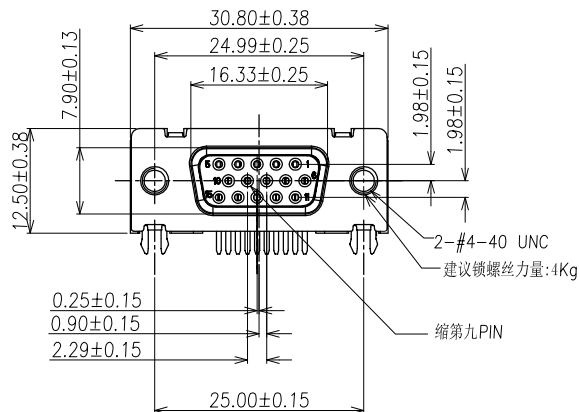


螺丝规格



1. 螺丝扭力为6.0±0.5KG;
2. 所附螺丝数量为装箱数*2, 并在此基础上增加1%的螺丝数量, 用塑料袋包装并贴上标签;

电镀规格:

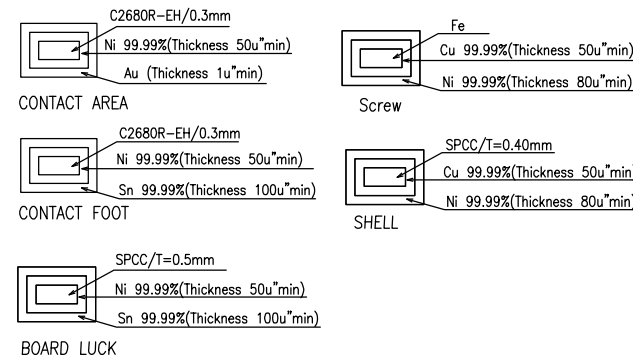

净重5.1g/pcs

6	SCREW	2	FERROALLOY	Ni PLATED
5	BOARD LUCK	2	FERROALLOY	Tin PLATED
4	Contact	15	COPPER ALLOY	Au And Tin plated
3	Shell	1	FERROALLOY	Ni PLATED
2	Cover	1	PBT	UL94V-0,BLUE/Black
1	Housing	1	PBT	UL94V-0,BLUE/Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE UNLESS OTHERWISE NOTED		德力康电子科技有限公司 DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD			
Angle	±5°	名称: D-SUB R/A 12.5H CONN			
X.	±0.50	档案名称: C-DSB4P-00-00			
.X	±0.38	FILE NAME.		料号: C-DSB4P-00-00	DSB4PD-15LS1YN3*
.XX	±0.25	DRAWING		PART NO:	
.XXX	±0.10	王永辉		CHECKED	APPROVED 严成旺
A4	UNIT:	mm	SCALE	1:1	SHEET: 1 of 1