

符合"DLK环境管理物质技术标准"

符合"DDWG协会标准"


| 工程变更通知单<br>ECN(DCN) NO. | 版本<br>REV | 日期<br>DATE | 说明<br>DESCRIPTION                           | 改变<br>CHANGE | 承认<br>APPRO. |
|-------------------------|-----------|------------|---------------------------------------------|--------------|--------------|
| KSECN13032              | A         | 20130729   | NEW                                         | —            | —            |
| KSECN13043              | B         | 20130904   | 依客户要求将PIN脚长1.90±0.15改为2.10±0.15 $\Delta$ *1 | 王永辉          | 严成旺          |
| KSECN13066              | C         | 20131226   | 后盖材质由LCP料改为PA66 $\Delta$ *1                 | 王永辉          | 严成旺          |

DVI2A D-24 H S1 Y N4 X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① PRODUCTION CODE (产品编码):  
DVI2A: DVI-D R/A DIP SERIES
- ② CHARACTER (特征):  
D: DIP TYPE
- ③ POSITION (位数):  
24: 24PIN
- ④ COLOR OF HOUSING (本体颜色):  
H: GRAY
- ⑤ PLATING OF CONTACT (端子电镀):  
S1: Au AND TIN PLATD
- ⑥ PACKAGE (包装):  
Y: TRAY PACKAGE
- ⑦ PLATING OF SHELL (铁壳电镀):  
N4: NI PLATD
- ⑧ TYPE:  
0: 无螺丝  
2: 锁螺丝  
3: 附螺丝







螺丝规格



1. 螺丝扭力为6.0±0.5KG;  
2. 所附螺丝数量为装箱数\*2, 并在此基础上增加1%的螺丝数量, 用塑料袋包装并贴上标签;

电镀规格

|                  |           |
|------------------|-----------|
| <br>CONTACT AREA | <br>螺丝    |
| <br>CONTACT FOOT | <br>SHELL |
| <br>叉片           | <br>铆钉    |

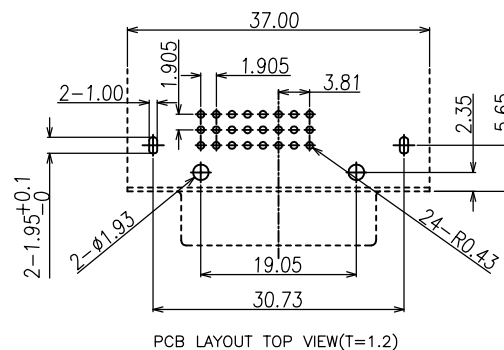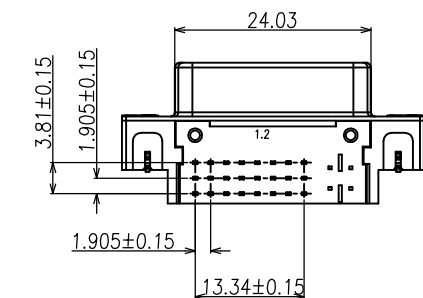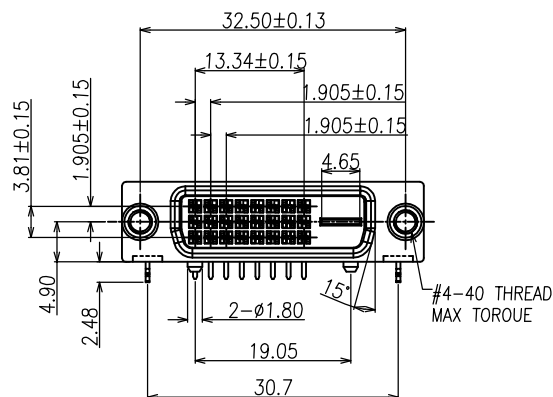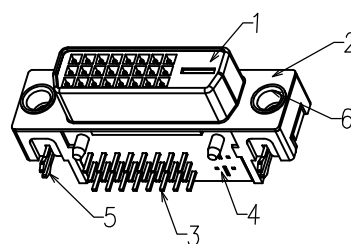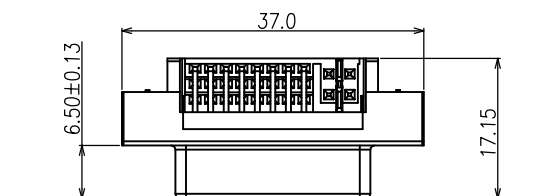

|     |            |      |                       |                |
|-----|------------|------|-----------------------|----------------|
| 6   | NUT        | 2    | BRASS                 | Ni PLATED      |
| 5   | BOARD LUCK | 2    | BRASS                 | Tin PLATED     |
| 4   | COVER      | 1    | PA66 $\Delta$         | UL94V-0, BLACK |
| 3   | CONTACT    | 24   | PHOSPHOR BRONZE/BRASS | Au PLATED      |
| 2   | SHELL      | 1    | SPCC                  | Ni PLATED      |
| 1   | HOUSING    | 1    | PA66                  | UL94V-0, GRAY  |
| NO. | ITEM       | Q'TY | DESCRIPTION           | FINISH         |

GENERAL TOLERANCE  
UNLESS OTHERWISE NOTED

|       |       |
|-------|-------|
| Angle | ±5°   |
| X.    | ±0.38 |
| .X    | ±0.30 |
| .XX   | ±0.25 |
| .XXX  | ±0.15 |
| A4    |       |



德力康电子科技有限公司  
DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

|                    |                      |                   |                  |
|--------------------|----------------------|-------------------|------------------|
| C 名称<br>TITLE:     | DVI-D R/A 9.8H CONN. | 料号<br>PART NO:    | DVI2AD-24HS1YN4* |
| 档案名称<br>FILE NAME. | C-DVI2A-00-00        | PART NO:<br>(OLD) | —                |
| DRAWING            | 王永辉                  | CHECKED           | —                |
| UNIT:              | mm                   | SCALE             | 1:1              |
| SHEET:             | 1 of 1               | APPROVED          | 严成旺              |