

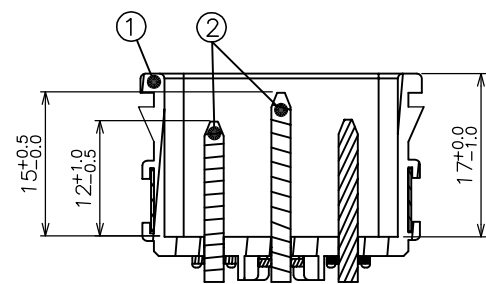
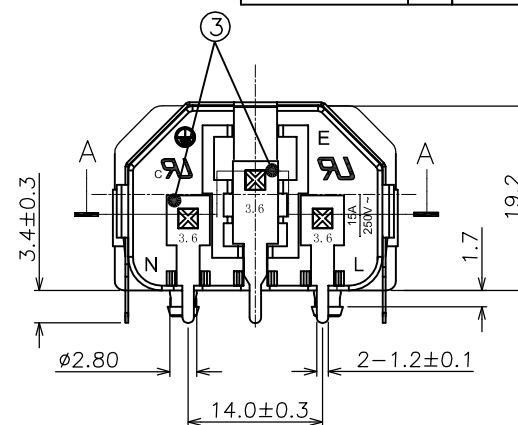
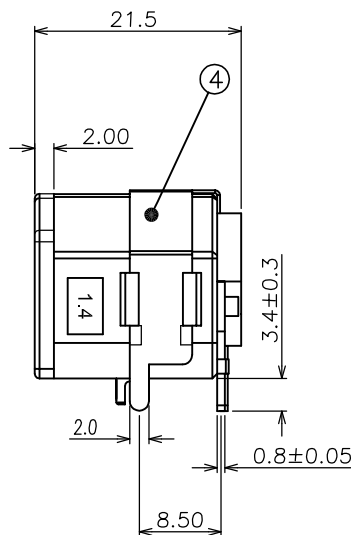
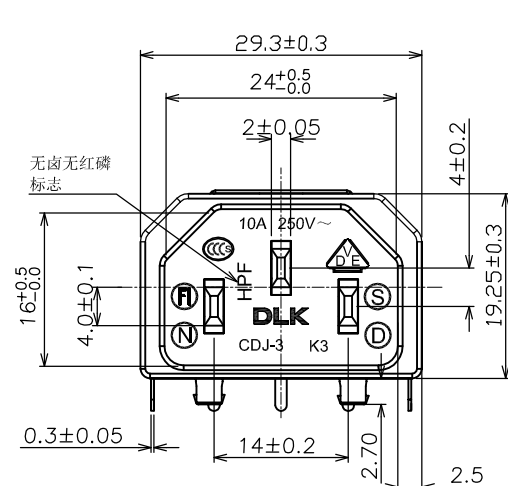


符合“DLK环境管理物质技术标准”

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN18022	A	20180404	NEW	—	—

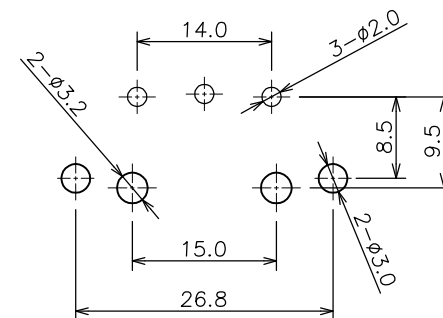

SECTION A-A

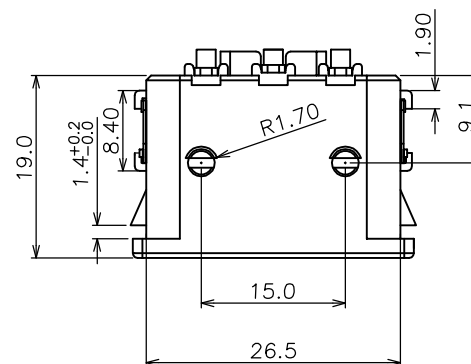

PCB LAYOUT

INSULATION RESISTANCE: 100MΩ MIN.
CONTACT RESISTANCE : ≤30mΩ
INSERTION FORCE : ≤60N
EXTRACTION FORCE : 10~50N

4	Soldering Pin	1	SPTE	Tin
3	Soldering Pin	3	Brass	Tin
2	Contact Pin	3	Brass	Tin
1	INSULATOR	1	PC UL94V-0	Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	±5°
X.	±0.30
.X	±0.25
.XX	±0.15
.XXX	±0.10
A4	⌀

德力康电子科技有限公司 DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD				
C 名称 TITLE:	CDJ-3 底部切平90D 无卤无红磷带铁壳			
档案名称 FILE NAME:	C-ACT3K-00-16HPF	料号 PART NO:	ACT3KD-03BT3B016HPF	
DRAWING	汪庆	CHECKED	王永辉	APPROVED 严成旺
UNIT:	mm	SCALE	1:1	SHEET: 1 of 1