


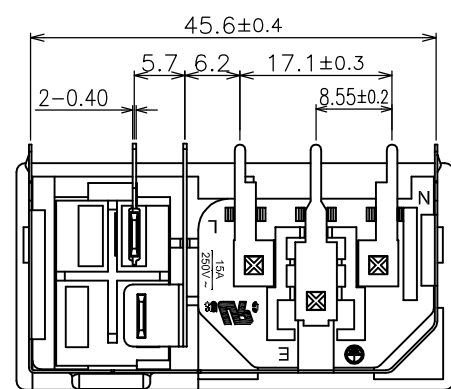
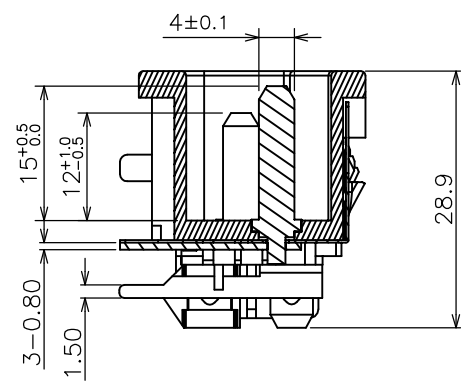
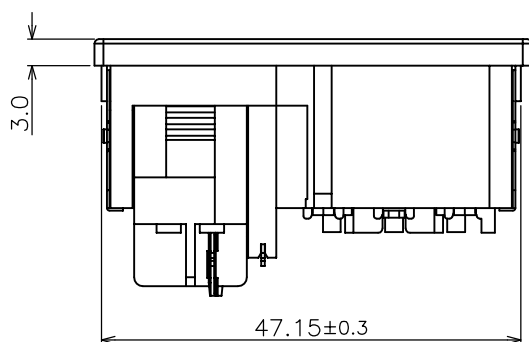
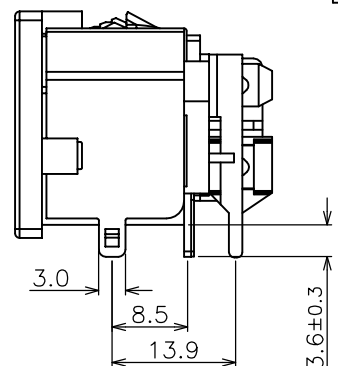
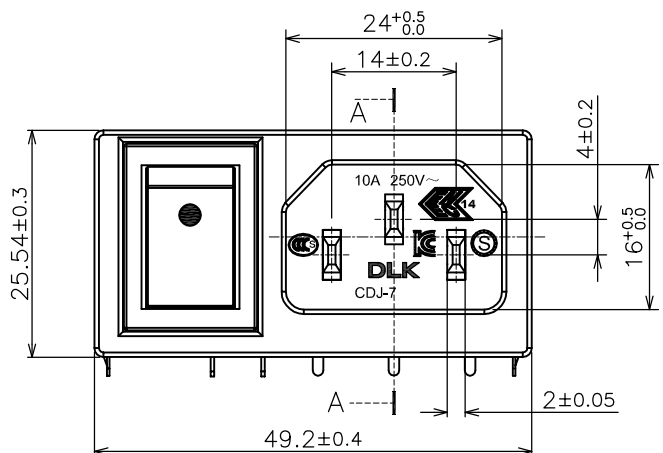




SWITCH NOTE:
INSULATION RESISTANCE: 100MΩ MIN.
CONTACT RESISTANCE : ≤50mΩ
VOLTAGE PROOF (Terminal To case): 1500VAC~ 1minute
CQC; ENEC 额定规格 RATING: 6A 250V~
KC 额定规格 RATING: 10A 250V~
UL; CUL 额定规格 RATING: 10A 250V~/10A 125V~



按下开关白点位置时, 为“闭合状态”.

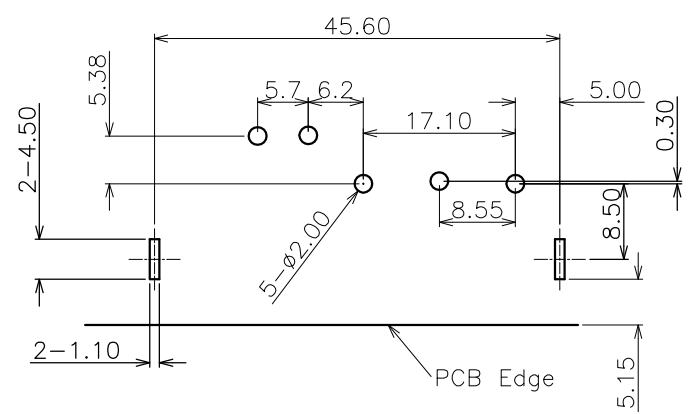

PCB LAYOUT TOP VIEW(T1.6)

GENERAL TOLERANCE UNLESS OTHERWISE NOTED		德力康电子科技有限公司 DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD					
Angle	±5°	C 名称	CDJ-7 + SWITHC	料号	PART NO: ACT7AD-03BT4B001		
X.	±0.30	档案名称	C-ACT7A-00-01	PART NO:	(OLD) CDJ-7 + SWITHC		
.X	±0.25	FILE NAME:					
.XX	±0.15	DRAWING	刻三东	CHECKED	~	APPROVED	李如均
.XXX	±0.10						
A4		UNIT:	mm	SCALE	1:1	SHEET:	2 of 2